

Dismantling Joint

FIG. 8601


Specifications

- Meet or exceed the requirements of ISO 2531, EN 545 and EN 598 Standard.
- Flange and Drilling complies with EN 1092-2 PN16 or ASTM B16.1 Class 125
- Drainage and sewerage with ISO 4633.
- Certificated to ANSI / NSF 61 & 372.

Corrosion Protection

- Fusion Bonded Coating or Liquid Epoxy Painted Interior and Exterior.

Schematic

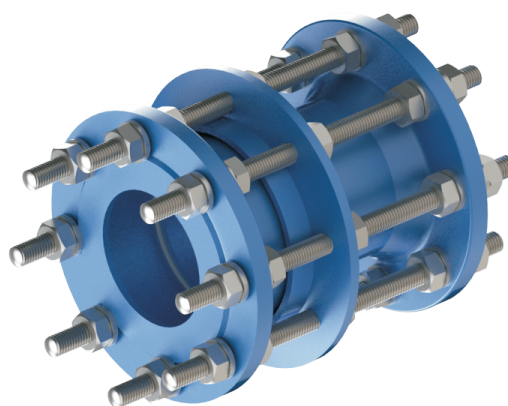


Material Specifications

Part	Material	ASTM Specification
Single flange pipe	Ductile Iron	A536 Grade 65-45-12
Adaptor	Ductile Iron	A536 Grade 65-45-12
Gland	Ductile Iron	A536 Grade 65-45-12
Rubber gasket	Rubber EPDM	D2000
Stud/Nut	Carbon Steel	A307 Grade B

Options

- Gland: Carbon Steel.
- Adaptor: Carbon Steel.
- Pipe: Carbon Steel.

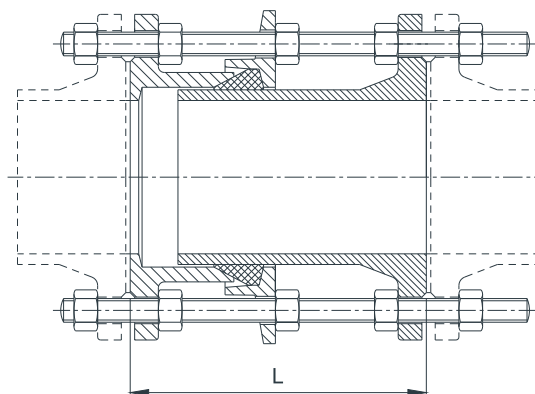

Main Dimensions(mm)

DN	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300	DN350	DN400	DN450
L	195	195	195	195	200	200	210	220	230	240	250	265
DN	DN500	DN600	DN700	DN800	DN900	DN1000	DN1200	DN1400	DN1600	DN1800	DN2000	DN2200
L	275	290	295	320	320	325	355	380	420	420	450	450

Notes

- Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.