

Flexible Coupling

FIG. 8602

Specifications


- Meet or exceed the requirements of ISO 2531, EN 545 and EN 598 Standard.
- Rubber seals - - Joint ring for water supply, drainage and sewerage pipelines in accordance with ISO 4633.
- Certificated to ANSI / NSF 61 & 372.

Corrosion Protection

- Fusion Bonded Coating or Liquid Epoxy Painted Interior and Exterior.

Material Specifications

Part	Material	ASTM Specification
Pipe	Ductile Iron	A536 Grade 65-45-12
Adaptor	Ductile Iron	A536 Grade 65-45-12
Body	Ductile Iron	A536 Grade 65-45-12
Rubber gasket	Rubber EPDM	D2000
Stud/Nut	Carbon Steel	A307 Grade B

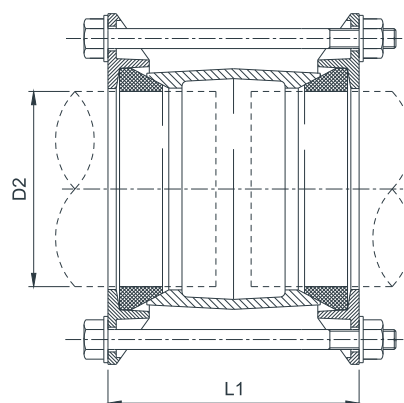

Main Dimensions(mm)

DN	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300	DN350	DN400	DN450
D2	66	82	98	118	144	170	222	274	326	378	429	480
L1	178	178	178	178	178	178	178	178	178	262	262	262
DN	DN500	DN600	DN700	DN800	DN900	DN1000	DN1200	DN1400	DN1600	DN1800	DN2000	DN2200
D2	532	635	738	842	945	1048	1255	1462	1668	1875	2082	2288
L1	262	262	262	262	278	278	290	290	290	437	437	437

Notes

- Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.