

Double Door Break Check Valve

FIG. F0413

Specifications

- Designed for C503 Wet Barrel Fire Hydrant.
- 6" Top and Bottom Flanges to ANSI B 16.1 Class 125.
- Rated Working Pressure 250 psi.

Corrosion Protection

- Fusion Bonded Epoxy Coated Interior and Exterior to AWWA C550 Standard.




Material Specifications

Part	Material	ASTM Specification
Check Valve Body	Ductile Iron	A536 Grade 65-45-12
Disc	Bronze	B62 C83600
Spring	Stainless Steel	A276 Type 304
Retainer Plate	Stainless Steel	A276 Type 304
Latch Pin	Stainless Steel	A276 Type 304
Pin	Stainless Steel	A276 Type 304
O-Ring	Rubber	NBR
Plug	Stainless Steel	A276 Type 304

Options

- A276 Type 304 SS Disc.

Schematic

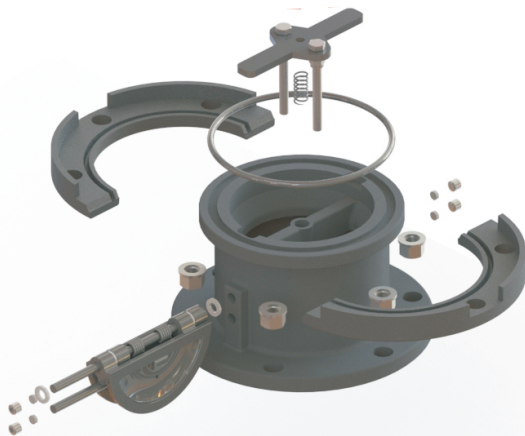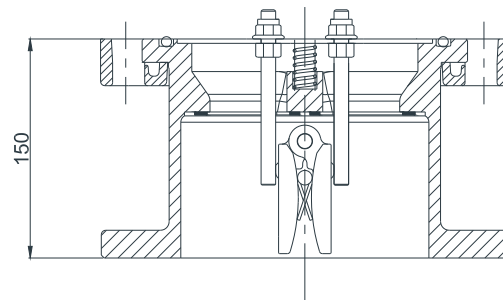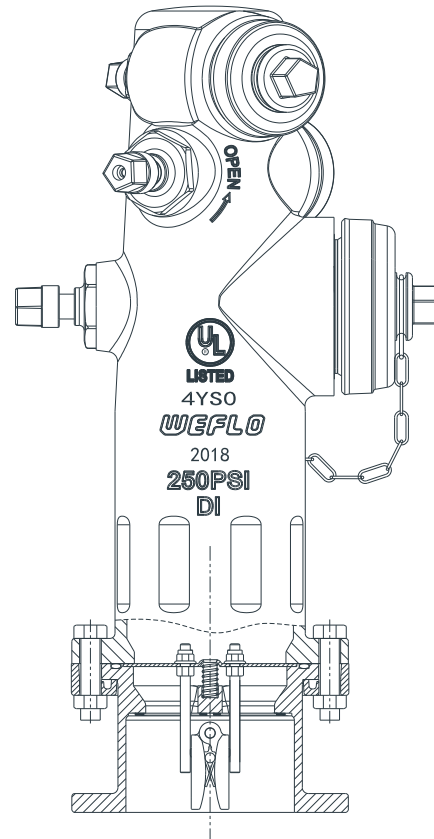

Notes

- Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.