

Vertical Indicator Post

FIG. F0601-IP

Specifications

- Meet or Exceed the Requirements of NFPA 24 Standard.
- Indicates the State of the Valve OPEN or SHUT Position.
- Target Nut to allow 90 to 102 Turns for F0601-IP.
- "L" Shaped Wrench Handle fitted with a Secure Padlock (provided by user).
- Protected Windows.
- Built-in Gear Assembly.
- Easily Adjustable Indicator OPEN and SHUT Targets.
- UL / ULC 789 Listed.
- CNBOP Certified.

Corrosion Protection

- Spray Painted Interior and Exterior to AWWA C550 Standard.
- Stand Barrel: Black Bitumen Coated.

Options

- Fusion Bonded Coating Interior and Exterior.
- Tapped Supervisory Tamper Switch.
- Operating Nut: Bronze ASTM B584 C84400 / B62 C83600.
- Operating Carrier Nut: Bronze ASTM B584 C84400 / B62 C83600.
- Stainless Steel Fasteners: A2-70 or A4-70.

Material Specifications

Part	Material	ASTM Specification
Upper Body	Gray Cast Iron	A126 Class B
Cap	Gray Cast Iron	A126 Class B
T-Head Bolt	Carbon Steel	A307 Grade B
Nut	Carbon Steel	A307 Grade B
Operating Nut	Stainless Steel	A351 Grade CF8
Screw	Carbon Steel	A307 Grade B
Retaining Ring	Spring Steel	UNS1066
Target Carrier Nut	Stainless Steel	A351 Grade CF8
Target Plate	Aluminum Alloy	B26
Windows	Plexiglass	Commercial
Gasket	Rubber	D2000 NBR
Hex Head Cap Screws	Carbon Steel	A307 Grade B
Operating Wrench	Ductile Iron	A536 Grade 65-45-12
Target lock Stud	Carbon Steel	A307 Grade B
Stud Nut	Carbon Steel	A307 Grade B
Operating Rod	Carbon Steel	A36
Plug	Malleable Iron	A47 Grade 22010
Stand Barrel	Carbon Steel	A36
Locking Bolts	Carbon Steel	A307 Grade B
Locking Nuts	Carbon Steel	A307 Grade B
Base Flange	Gray Cast Iron	A126 Class B
Crane Coupling	Ductile Iron	A536 Grade 65-45-12
Cotter Pin	Stainless Steel	A276 Type 304
Built-in Gear Ass.		

Note

• Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.

Schematic

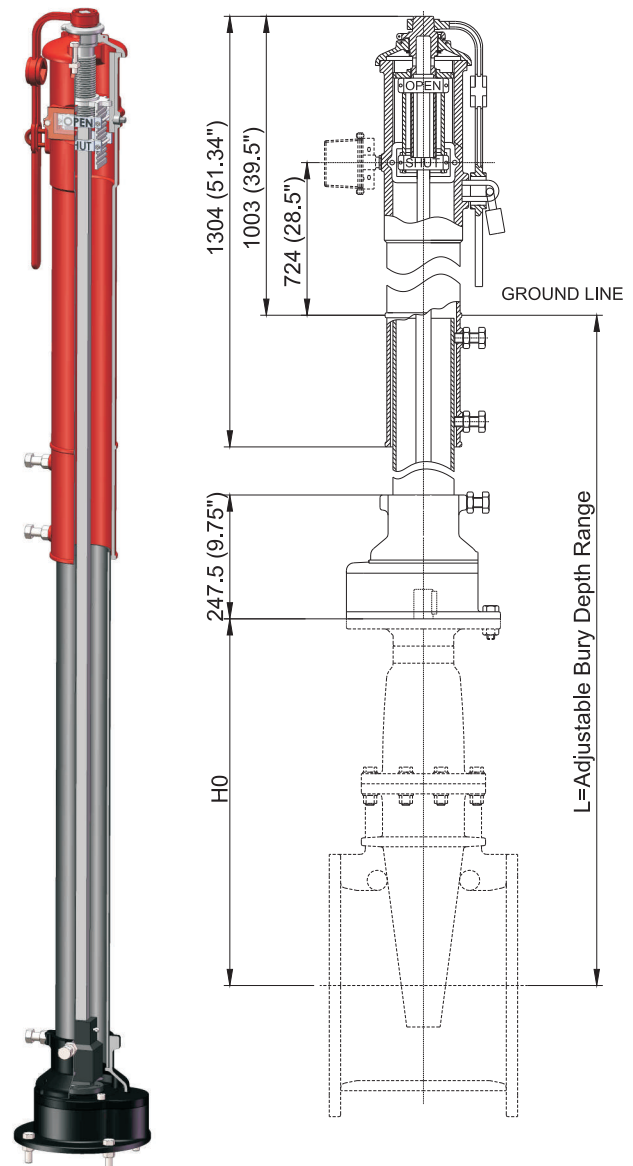


FIG. F0601-IP (Size 14" to 24")

Dimension Data for WEFLO Vertical Indicator Post (mm/inch)

Size		14	16	18	20	24
Turns to Open		90	102	77	85	102
L	Min.	1290/50.8	1360/53.5	1470/57.9	1560/61.4	1690/66.5
	Max.	2095/82.5	2165/85.2	2275/89.6	2365/93.1	2495/98.2