

Adjustable Wall Indicator Post


FIG. F0800-WP

Specifications

- Meets or Exceeds the Requirements of NFPA 24 Standard.
- Indicate if the Post Indicator Valve is OPEN or SHUT.
- Target Nut Allows 13 to 45 Turns to Open (3"-14" Valve size).
- Viewing Windows are Polycarbonate with UV Resistance.
- Stem Telescopes to Required Length, no cutting necessary.
- OPEN / SHUT targets are Easily Adjustable.
- UL / ULC 789 Listed, FM 1110 Approved.
- CNBOP Certified.
- RAL 3000 Safety Red Lined / Coated.

Material Specifications

Part	Material	ASTM Specification
Post Head	Gray Cast Iron	A126 Class B
Operating Wrench	Ductile Iron	A536 Grade 65-45-12
Retaining Ring	Stainless Steel	A276 Type 304
Weather Cap	Polyethylene	Commercial
Threaded Sleeve	Stainless Steel	A276 Type 304
Pipe Plug	Malleable Iron	A47 Grade 22010
Target Plate	Aluminum Alloy	B26
Screw	Carbon Steel	A307 Grade B
Windows	Plexiglass	Commercial
Gasket	Rubber	D2000 NBR
Upper Stem	Carbon Steel	A36
Lower Stem	Carbon Steel	A36
Cotter Pin	Stainless Steel	A276 Type 304
Crane Coupling	Carbon Steel	A36

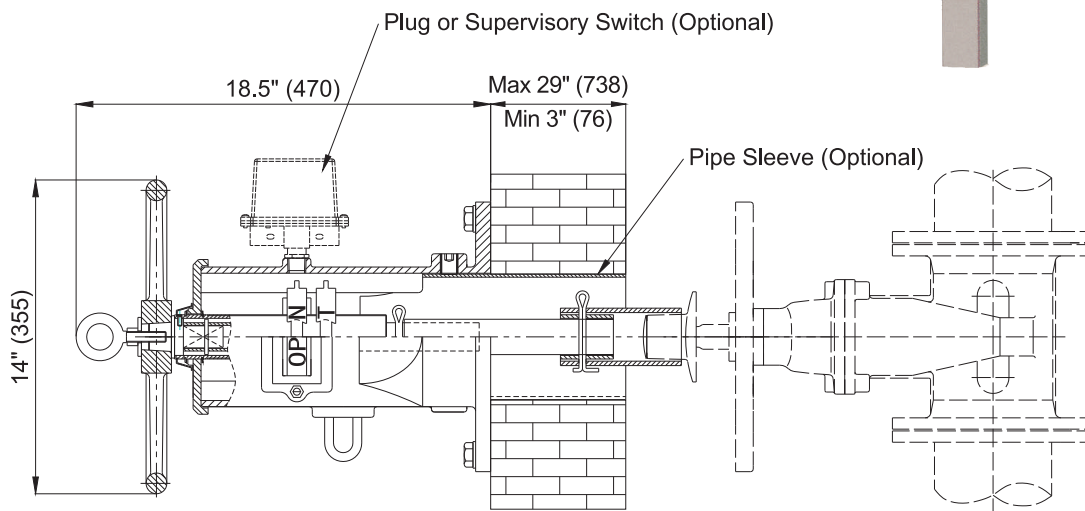

Options

- Stainless Steel Fasteners: A2-70 or A4-70.
- Sleeve Pipe optional.

Filed Adjustment

- Remove the Post Head to adjust OPEN and SHUT Signs as required.
- Adjust Telescoping Rod and Pipe to Desired Length.
- Re-attach the Post to the Post Flange on the Valve.

Note

• Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.