

C515 OS&Y Resilient Seated Gate Valve 28" - 30" FL x FL Ends

FIG. F1111-300

Specifications

- Meet or exceed the requirements of AWWA C515 Standard.
- Full Waterway.
- Adjustable Packing.
- Ductile-Iron Wedge, EPDM Encapsulated.
- Flanged to ASME B16.1 Class 125.
Other Flange Types available upon request.
- Rated Working Pressure: 300 psi.
- UL Listed.

Corrosion Protection


- Fusion Bonded Epoxy Coated Interior and Exterior to AWWA C550 Standard.

Main Dimensions (mm/inch)

Size	28"	30"
L	610/24.0	610/24.0
H (Open)	3304/130.0	3275/128.9
D	1220/48.0	1220/48.0

Material Specifications

Part	Material	ASTM Specification
Body	Ductile Iron	A536 Grade 65-45-12
Wedge	EPDM Fully Encapsulated Ductile Iron	
Wedge Nut	Bronze	B148 C95200
Stem	Stainless Steel	A276 Type 304
Gasket	Rubber EPDM	D2000
Bonnet	Ductile Iron	A536 Grade 65-45-12
Packing	Graphite	Non-Asbestos
Packing Bushing	Brass	B124 C37700
Packing Gland	Ductile Iron	A536 Grade 65-45-12
Yoke	Assembly	Carbon Steel
Stem Nut	Bronze	B148 C95200
Lock Nut	Carbon Steel	A36
Stem Nut	Bronze	B148 C95200
Handwheel	Carbon Steel	A36
Handwheel Nut	Carbon Steel	A36

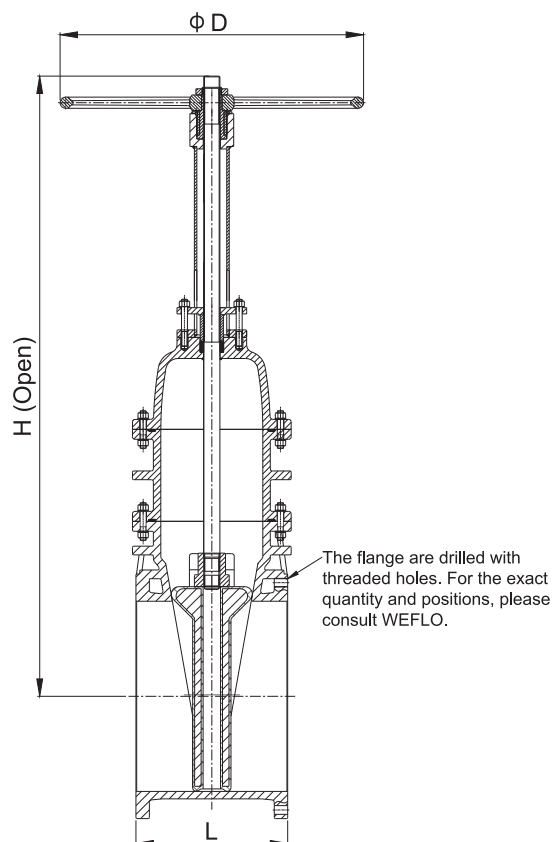

Notes

- Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.